


5 Place the strap for the handles over the sides of the pocket, and then stitch along the inside and outside of the strap.




Sew X-shaped reinforcements at the openings of the body. After all other stitching is finished, sew the ends of the strap together with a zigzag stitch.

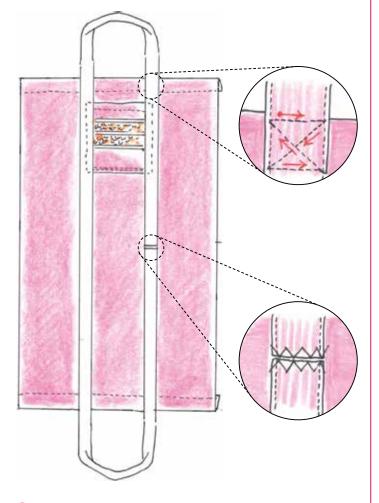


6 Fold in half with right sides together, and then stitch along both sides.



7 Stitch the gussets. Open the opening to the front and back, and then fold the bottom corner to form a triangle. Sew straight stitching perpendicular to the seam so that the stitching has a width of 25 cm.

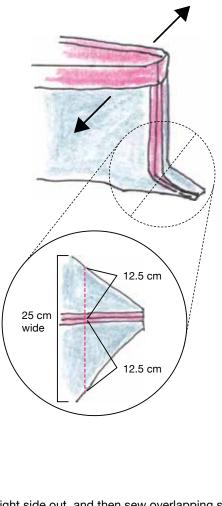

8 Turn right side out, and then sew overlapping stitching at the opening to reinforce the side seams.



Sew back and forth 2 to 3 times.